



## Ecoguss project drain DN 50, vert., Variofix, Design cover

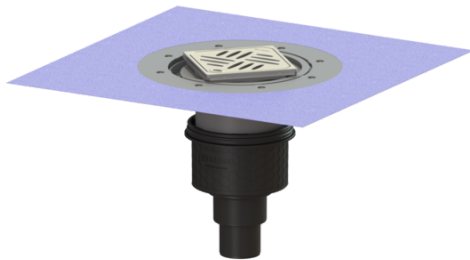

### Article information

Item no.: 48458.53  
GTIN: 4026092052877  
Price group: 40

### Advantages

- High-tech Ecoguss composite material
- Highest fire protection standards
- Scientifically confirmed sound protection effect

### Description

The Ecoguss project drain with connection flange is used for point drainage and is equipped with a removable odour trap as well as a lip seal and a temporary protective cover. The recyclable composite material Ecoguss meets the highest noise protection requirements, is temperature-resistant, resistant to aggressive media, and has a permanently corrosion-free surface. It is also briefly flammable from 100 to 400 degrees Celsius. The outlet socket is suitable for connection to SML cast iron pipes. Separate equipotential bonding is not necessary.

#### Variant

|                                           |                                                                 |
|-------------------------------------------|-----------------------------------------------------------------|
| System:                                   | 125                                                             |
| Waterproofing layer on the upper section: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Waterproofing layer on the drain body:    | Connection flange                                               |
| Sealing water height:                     | 50 mm                                                           |

#### General characteristics

|                          |                           |
|--------------------------|---------------------------|
| Standard:                | EN 1253-1                 |
| Nominal size (DN):       | 50                        |
| Outer diameter (OD):     | 58 mm                     |
| Inlet max. scoring (DN): | Z-19.53-2414,Z-19.17-1719 |

#### Dimensions

|               |         |
|---------------|---------|
| Net weight:   | 2,79 kg |
| Gross weight: | 3,55 kg |
| Diameter:     | 135 mm  |

|                         |                                                     |
|-------------------------|-----------------------------------------------------|
| Vertical adjustment:    | vertically adjustable upper section                 |
| Length:                 | 135 mm                                              |
| Width:                  | 135 mm                                              |
| Packaging dimension:    | length                                              |
| Packaging dimension:    | width                                               |
| Packaging dimension:    | height                                              |
|                         |                                                     |
| Tank/drain body         |                                                     |
| Number of outlets:      | 1                                                   |
| Material of drain body: | Ecoguss                                             |
| System:                 | vertical                                            |
|                         |                                                     |
| Coverage features       |                                                     |
| Type of cover:          | Design cover                                        |
| Cover material:         | Stainless steel 14301                               |
| Colour of cover:        | silver                                              |
| Width of cover:         | 120 mm                                              |
| Length of cover:        | 120 mm                                              |
| Min. flooring height:   | 10 mm                                               |
| Surface:                | ground                                              |
| Frame material:         | Stainless steel 14301                               |
| Cover locking:          | Lock & Lift                                         |
| Load class:             | L 15 (EN 1253-1)                                    |
| Grating colour:         | Kessel                                              |
| Slip resistance class:  | R9 according to DIN 51130; C according to DIN 51097 |
|                         |                                                     |
| Rim length:             | 132 mm                                              |
| Rim material:           | 132 mm                                              |
| Max. flooring height:   | 24 mm                                               |
| Upper section:          | adjustable in three dimensions                      |
| Shape of upper section: | square                                              |
| Upper section material: | ABS                                                 |
| Odour trap:             | included                                            |